


# WOLVERINE TUBE **TURBO-CEP**<sup>®</sup>

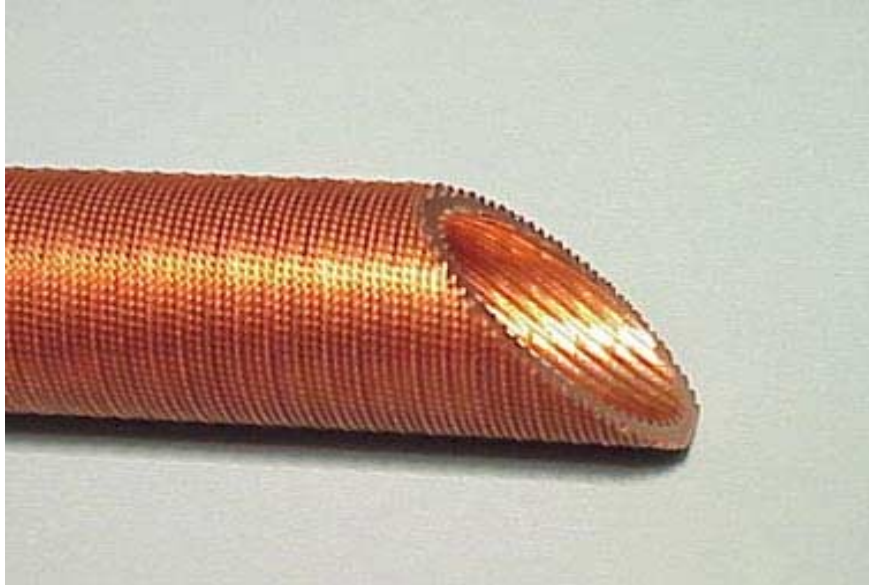

- **Alloys Available and Applicable Standards**

UNS C12200 (DHP Copper) to ASME SB75 and ASME SB359

- **Product Formats**

Straight Lengths to 20 feet, + 1/8 inch maximum variation

Straight Lengths over 20 feet, + 5/32 inch maximum variation

Ends are supplied either brush deburred or chamfered

- **Packaging**

Packaging options include wooden boxes and shipping frames.

- **Tempers Available**

As fabricated temper

- **Testing**

All tubes are tested per the requirements of ASTM E243.

## ID/OD Enhanced Surface for Improved Heat Transfer

Turbo-CEP is designed for light hydrocarbon condensing. The integral helical fins on the outside of the tube are modified to enhance the condensing heat transfer coefficient. The inside heat transfer coefficient is improved because of increased surface area and turbulence induced by integral helical ridges on the inside surface. The availability of plain ends and intermediate lands makes Turbo-CEP especially suitable for shell and tube condensers.

The increased ID ridge count improves the overall heat transfer efficiency of Turbo-CEP over Turbo-C, while slightly increasing the ID pressure drop. Furthermore, Turbo-CEP has higher waterside performance than Turbo-CDI due to a different inside geometry. Where there is a need for low ID pressure drop, several sizes are available in Turbo-CEP. It may also be supplied with a smooth bore.

### Turbo-CEP - UNS C12200

Standard Sizes			Plain End Dimensions		Finned Section Dimensions			
Catalog Number	Outside Diameter inch (mm)	Nominal Wall inch (mm)	Outside Diameter inch (mm)	Wall inch (mm)	Fin Per Inch	Finished Fin OD inch (mm)	Min. Wall Under Fins inch (mm)	Root Diameter inch (mm)
31-4050025	3/4 (19.05)	0.025 (0.635)	0.743 (18.87)	0.049 (1.23)	40	0.743 (18.87)	0.025 (0.635)	0.668 (16.97)
31-4053228	3/4 (19.05)	0.028 (0.711)	0.743 (18.87)	0.049 (1.23)	40	0.743 (18.87)	0.025 (0.635)	0.668 (16.97)

### Turbo-CEP - UNS C12200

Standard Sizes		Inside Dimensions		Areas			
Catalog Number	Weight Per Unit Length lb/ft (kg/m)	Nominal Inside Diameter inch (mm)	Nominal Ridge Height inch (mm)	Nominal Inside Surface Area ft <sup>2</sup> /ft (m <sup>2</sup> /m)	Actual Inside Surface Area ft <sup>2</sup> /ft (m <sup>2</sup> /m)	Nominal Outside Surface Area ft <sup>2</sup> /ft (m <sup>2</sup> /m)	Actual Outside Surface Area ft <sup>2</sup> /ft (m <sup>2</sup> /m)
31-4053228	0.360 (0.536)	0.612 (15.54)	0.019 (0.483)	0.160 (0.049)	0.264 (0.080)	0.196 (0.060)	0.711 (0.217)
31-4053228	0.360 (0.536)	0.612 (15.54)	0.019 (0.483)	0.160 (0.049)	0.264 (0.080)	0.196 (0.060)	0.711 (0.217)

## WOLVERINE TUBE, INC.

*Engineered products for heat transfer*

Contact us at (256) 353-1310 or [mkt@wlv.com](mailto:mkt@wlv.com)